

# QG series

## QG76 analog H-series

QG76-SD-010H-AV-CM


### Inclination sensor

2 axis horizontal mounting

Programmable device  
Output: 0,5 - 4,5 V

Measuring range programmable  
between  $\pm 1^\circ$  and  $\pm 10^\circ$

Measuring range  
Factory defaults:  $\pm 10^\circ$

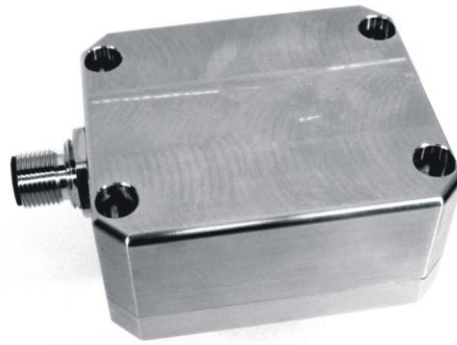

### General specifications 12398, v20170825


Housing	Stainless steel (AISI 316)
Dimensions (indicative)	70x60x33 mm
Mounting	Included: 4x M4x30 mm stainless steel (A4) Hexagon socket head screws
Ingress Protection (IEC 60529)	IP67
Relative humidity	0 - 100%
Weight	approx. 700 gram
Supply voltage	8 - 30V dc
Polarity protection	Yes
Current consumption	$\leq 50$ mA
Operating temperature	-40 .. +85 °C
Storage temperature	-40 .. +85 °C
Measuring range	Factory defaults: $\pm 10^\circ$
Centering function	Yes (2,5 V = 0°), range: $\pm 5^\circ$
Frequency response (-3dB)	0 - 10 Hz
Accuracy (typ. and/or $2\sigma$ )	overall 0,04° typ.
Offset error	$< \pm 0,02^\circ$ typ. ( $< \pm 0,05^\circ$ max.) after centering
Non linearity	$< \pm 0,04^\circ$ typ. ( $< \pm 0,09^\circ$ max.)
Sensitivity error	not applicable
Resolution	0,01°
Temperature coefficient	$\pm 0,005^\circ/\text{K}$ typ.
Max mechanical shock	20.000g
Output	0,5 - 4,5 V
Output load	Rload $\geq 20\text{k}\Omega$ , Cload $\leq 20$ nF
Short circuit protection	Yes (max 10 s)
Output refresh rate	20 ms
Programming options	by optional QG65-configurator (measuring range, filtering)

## QG76-SD-010H-AV-CM

$$U_{out} = 2,5 + 2 \cdot (\alpha/10) [V]$$

clipping outside measuring range

### Transfer characteristic

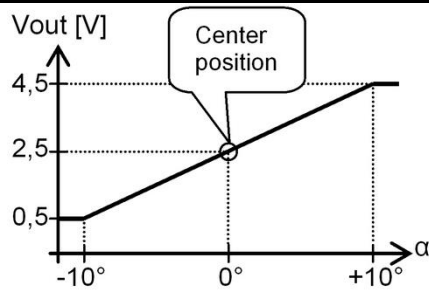


Default 0°: horizontal (top upwards), no acceleration applied.

Cross tilt sensitivity error:  
 $< (0,12 \cdot \text{cross tilt angle})^2 \% \text{ typ.}$

→ one axis  $< 10^\circ$  tilt for max. accuracy

### Measurement orientation

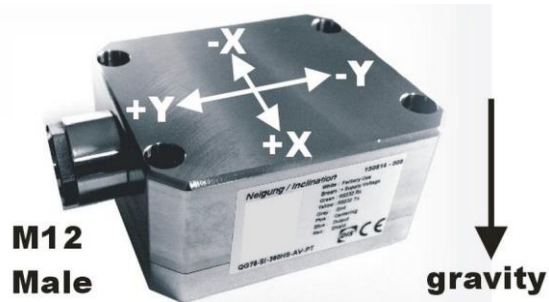


### Connectivity (length $\pm 10\%$ )

Connection


M12 male 8p connector (stainless steel 1.4404 (316L), contacts copper alloy)

Wire / pin coding

- |        |                                |
|--------|--------------------------------|
| Pin 1: | Output Y                       |
| Pin 2: | Supply voltage                 |
| Pin 3: | Programming interface RS232 Rx |
| Pin 4: | Programming interface RS232 Tx |
| Pin 5: | Gnd                            |
| Pin 6: | Centering input                |
| Pin 7: | Output X                       |
| Pin 8: | Not connected                  |



### Mechanical dimensions (indicative only)

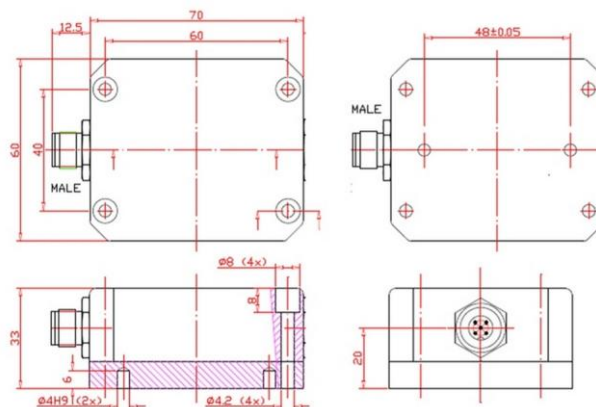

### Center function

Centering can be done to eliminate mechanical offsets. To execute centering connect center input to ground ( $> 0,5\text{sec}$ ) within 1 min. after power up. After centering you have 1 min. left for another centering. Normally the center input should be left unconnected.

As this device is accelerometer-based the sensor is inherent sensitive for accelerations/vibrations. Application specific testing must be carried out to check whether this sensor will fulfil your requirements.