

# QG series

## QG76 analog H-series

QG76-SI-360H-AI-CM

### Inclination sensor


1 axis vertical mounting

Programmable device

Output: 4 - 20 mA

Measuring range programmable  
between 1° and 360°

Measuring range  
Factory default: 360°

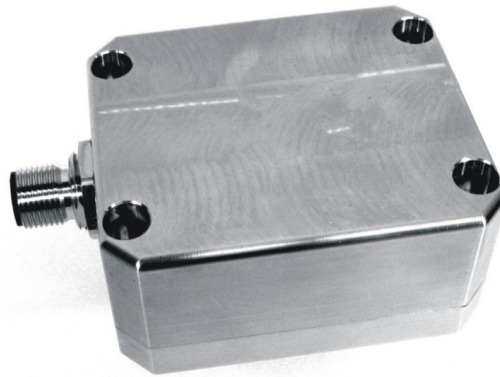


### General specifications 12399, v20170825

Housing	Stainless steel (AISI 316)
Dimensions (indicative)	70x60x33 mm
Mounting	Included: 4x M4x30 mm stainless steel (A4) Hexagon socket head screws
Ingress Protection (IEC 60529)	IP67
Relative humidity	0 - 100%
Weight	approx. 700 gram
Supply voltage	10 - 30 V dc
Polarity protection	Yes
Current consumption	≤ 50 mA ( excluding output signal )
Operating temperature	-40 .. +85 °C
Storage temperature	-40 .. +85 °C
Measuring range	Factory default: 360°
Centering function	Yes (12 mA = 0°), range 360°
Frequency response (-3dB)	0 - 10 Hz
Accuracy (typ. and/or 2σ)	overall 0,07° typ.
Offset error	< ± 0,03° typ. (< ± 0,08° max.) after centering
Non linearity	< ± 0,06° typ. (< ± 0,15° max.)
Sensitivity error	not applicable
Resolution	0,01°
Temperature coefficient	± 0,005°/K typ.
Max mechanical shock	20.000g
Output	4 - 20 mA
Output load	Rload ≤ (50*Vs-300) [Ω] (Eg: Vs = 24 V: Rload ≤ 900 Ω)
Short circuit protection	Yes (max 10 s)
Output refresh rate	20 ms
Programming options	by optional QG65-configurator (measuring range, filtering)

## QG76-SI-360H-AI-CM

$$I_{out} = 4 + 16 \cdot (\alpha / 360) \text{ [mA]}$$

### Transfer characteristic

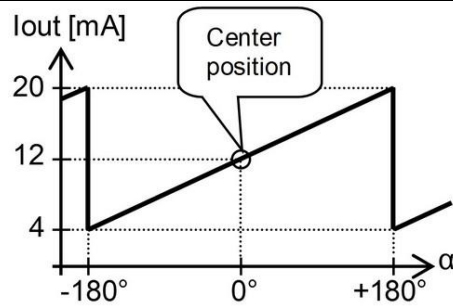


Rotation in vertical plane.

Lateral tilt sensitivity error:  
 $< \pm 0,03^\circ$  lateral tilt (typ.)  
 Max. lateral tilt:  $45^\circ$

Drawn in default  $0^\circ$  position.

### Measurement orientation

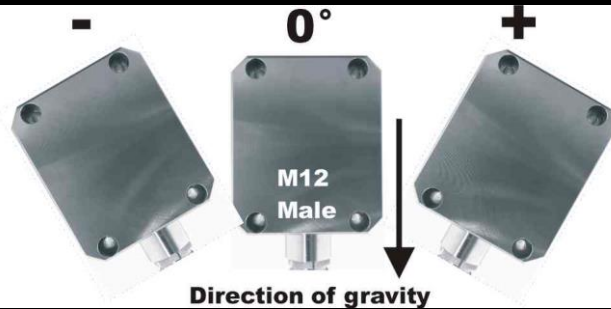

Direction of gravity


### Connectivity (length $\pm 10\%$ )

#### Connection


M12 male 8p connector (stainless steel 1.4404 (316L), contacts copper alloy)

#### Wire / pin coding

- Pin 1: Output for factory use only
- Pin 2: Supply voltage
- Pin 3: Programming interface RS232 Rx
- Pin 4: Programming interface RS232 Tx
- Pin 5: Gnd
- Pin 6: Centering input
- Pin 7: Output
- Pin 8: not connected



### Mechanical dimensions (indicative only)

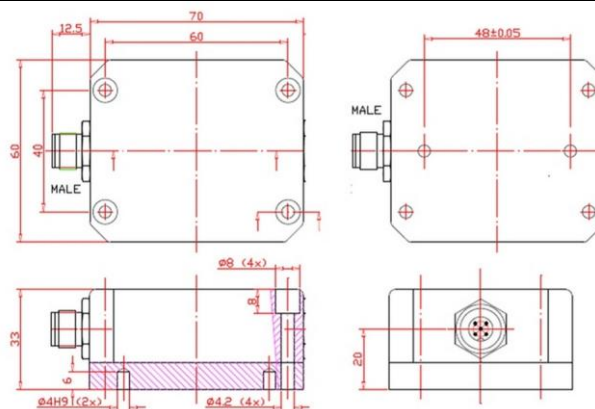

### Center function

Centering can be done to eliminate mechanical offsets. To execute centering connect center input to ground ( $>0,5\text{sec}$ ) within 1 min. after power up. After centering you have 1 min. left for another centering. Normally the center input should be left unconnected.

As this device is accelerometer-based the sensor is inherent sensitive for accelerations/vibrations. Application specific testing must be carried out to check whether this sensor will fulfil your requirements.