

QG series

Discontinued: QG65 analog H-series. Successor: QG65N2 High accuracy series

QG65-KD-010H-AI-CM

Inclination sensor

2 axis horizontal mounting

Factory programmable device

Output: 4 - 20 mA

Measuring range programmable

between $\pm 1^\circ$ and $\pm 10^\circ$

Measuring range

Factory defaults: $\pm 10^\circ$




General specifications 11925A, v20241021

Housing	Reinforced plastic injection molded (Faradex DS, black, EMI shielded by stainless steel fiber in PC)
Dimensions (indicative)	60x50x27 mm
Mounting	Included: 4x M5x25 mm zinc plated steel pozidrive pan head screws, self-tapping (PZ DIN7500CZ) Mounting on flat surface only. Screw with care
Ingress Protection (IEC 60529)	IP67, IP69K (with IP69K mating connector)
Relative humidity	0 - 95% (non condensing, housing fully potted)
Weight	approx. 110 gram
Supply voltage	10 - 30 V dc
Polarity protection	Yes
Current consumption	≤ 25 mA (excluding output signal)
Operating temperature	-40 .. +85 °C
Storage temperature	-40 .. +85 °C
Measuring range	Factory defaults: $\pm 10^\circ$
Centering function	Yes (12 mA = 0°), range: $\pm 5^\circ$
Frequency response (-3dB)	0 - 10 Hz
Accuracy (overall @20°C)	0,04° typ.
Offset error	$\pm 0,02^\circ$ typ. ($\pm 0,05^\circ$ max) after centering
Non linearity	$\pm 0,04^\circ$ typ., $\pm 0,07^\circ$ 2 σ , $\pm 0,09^\circ$ max.
Sensitivity error	not applicable. Repeatability 0,05°
Resolution	0,01°
Temperature coefficient	$\pm 0,005^\circ/K$ typ.
Max mechanical shock	20.000g
Output	4 - 20 mA
Output load	Rload \leq (50*Vs -300) (Ω) (Eg: Vs = 24 V: Rload \leq 900 Ω)
Short circuit protection	Yes (T<55°C), Max 10 s (T>55°C)
Output refresh rate	20 ms
Programming options	Factory programmable (measuring range, filtering)

QG65-KD-010H-AI-CM

Transfer characteristic

$I_{out} = 12 + 8 \cdot (\alpha/10)$ [mA]
clipping outside measuring range

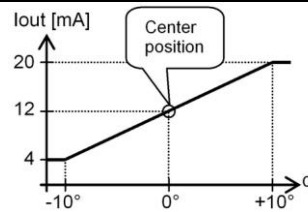

Measurement orientation

Default 0°: horizontal (label upwards), no acceleration applied.

Cross tilt sensitivity error:
 $< (0,12 \cdot \text{cross tilt angle})^2$ % typ.




Connectivity (cable length $\pm 10\%$)

Connection


M12 male 8p A-coding connector (Brass Nickel coated, contacts copper alloy)

Wire / pin coding

- | | |
|--------|----------------------|
| Pin 1: | Output Y |
| Pin 2: | Supply voltage |
| Pin 3: | for factory use only |
| Pin 4: | for factory use only |
| Pin 5: | Gnd |
| Pin 6: | Centering input |
| Pin 7: | Output X |
| Pin 8: | Not connected |



Mechanical dimensions (indicative only)

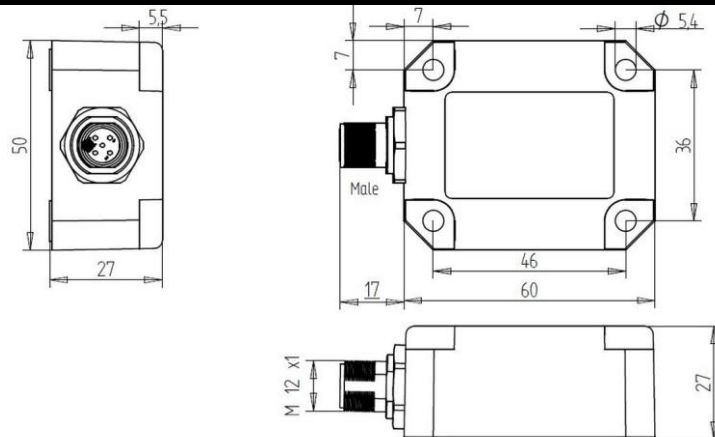

Center function

Centering can be done to eliminate mechanical offsets. To execute centering connect center input to ground ($>0,5\text{sec}$) within 1 min. after power up. After centering you have 1 min. left for another centering. Normally the center input should be left unconnected.

Optional: for accurate mounting two factory mounted positioning pins can be mounted ($\varnothing 4\text{mm}$) replacing 2x M5x25 mm.

As this device is accelerometer-based the sensor is inherent sensitive for accelerations/vibrations. Application specific testing must be carried out to check whether this sensor will fulfil your requirements.