QG series



QG76-SI-360H-AI-CM-UL

Inclination sensor

1 axis vertical mounting

Factory programmable device Output: 4 - 20 mA

Measuring range programmable between 1° and 360°

Measuring range Factory default: ±180°

Housing Dimensions (indicative) Mounting Ingress Protection (IEC 60529) Relative humidity Weight Supply voltage Polarity protection Current consumption Operating temperature Storage temperature Measuring range Centering function Frequency response (-3dB) Accuracy (overall @20°C) Offset error Non linearity Sensitivity error Resolution Temperature coefficient Max mechanical shock Output Output load Short circuit protection Output refresh rate Programming options

QG76 analog H-series



General specifications 12399, v20230412		
Stainless steel (AISI 316)		
70x60x33 mm		
Not Included: 4x M4x30 mm stainless steel (A4) Hexagon socket head screws		
IP67, IP69K (with IP69K mating connector), (IP68 with optional cable gland)		
0 - 95% (non condensing, housing fully potted)		
approx. 700 gram		
10 - 30 V dc		
Yes		
≤ 25 mA (excluding output signal)		
-40 +80 °C		
-40 +85 °C		
Factory default: ±180°		
Yes (12 mA = 0°), range 360°		
0 - 10 Hz		
0,07° typ.		
± 0,03° typ. (± 0,08° 2σ) after centering		
± 0,06° typ., ± 0,1° 2σ, ± 0,15° max.		
not applicable. Repeatability 0,05°		
0,01°		
± 0,005°/K typ.		
20.000g		
4 - 20 mA		
Rload \leq (50*Vs -300) (Ω) (Eg: Vs = 24 V: Rload \leq 900 Ω)		
Yes (T<55°C), Max 10 s (T>55°C)		
20 ms		
Factory programmable (measuring range, filtering)		


QG series

DIS sensors

lout = $12 + 8*(\alpha/180)$ [mA]

Centering can be done to eliminate mechanical offsets. To execute centering connect center input to ground (>0,5sec) within 1 min. after power up. After centering you have 1 min. left for another centering. Normally the center input should be left unconnected.


QG76-SI-360H-AI-CM-UL

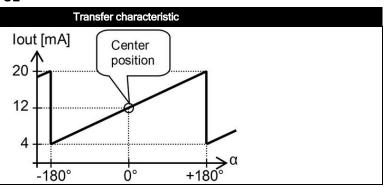

Rotation in vertical plane.

Lateral tilt sensitivity error: $<\pm 0.03^{\circ}/^{\circ}$ lateral tilt (typ.) Max. lateral tilt: 45°

Drawn in default 0° position.

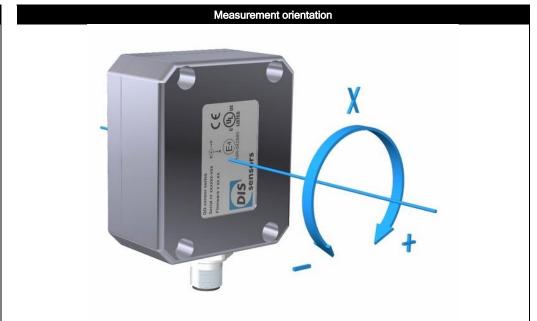


Connection


Wire / pin coding

Connectivity (cable length ±10%)

M12 male 8p connector (stainless steel 1.4404 (316L), contacts copper alloy)

·	•
Pin 1:	Output for factory use on
Pin 2:	Supply voltage
Pin 3:	for factory use only
Pin 4:	for factory use only
Pin 5:	Gnd
Pin 6:	Centering input
Pin 7:	Output
Pin 8:	not connected



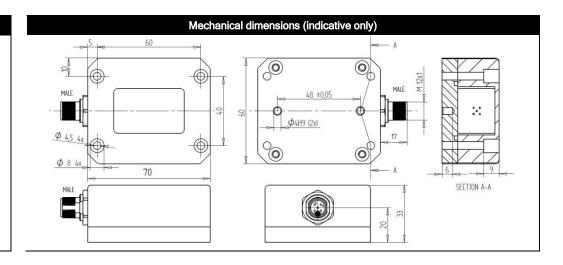

QG series



Center function, intended use & UL

Centering can be done to eliminate mechanical offsets. To execute centering connect center input to ground (>0,5sec) within 1 min. after power up. After centering you have 1 min. left for another centering. Normally the center input should be left unconnected.

QG series sensors are intended to measure inclination/acceleration/tilt. Flawless function (acc. spec.) is ensured only when used within specifications. This device is not a safety component acc. to EU Machine Directive (ISO13849). For full redundancy two devices can be used. Modifications or non-approved use will result in loss of warranty and void any claims against the manufacturer.

UL & c-UL listed product (File number E312057, UL508 standards UL60947-5-2 & CSA-C22,2 No. 14) Product Identity / Category Code Number (CCN): Industrial Control Equipment / NRKH & NRKH7 Enclosure rating: type 1, Ambient temperature: max 80 °C (see also datasheet, lowest value applies) Electrical ratings: Intended to be used with a Class 2 power source in accordance with UL1310, max. input Voltage 32V dc (see also datasheet, lowest value applies), max. current 200mA Accessory Cable Assembly: Any UL-listed (CYJV/7) mating connector with mechanical locking, wire thickness of at least 30 AWG (0,05 mm²), recommended ≤23 AWG (≥0,25 mm²)

As this device is accelerometer-based the sensor is inherent sensitive for accelerations/vibrations. Application specific testing must be carried out to check whether this sensor will fulfil your requirements.