

QR series



QR30N-360HB-VK-5V
Absolute rotary encoder (contactless)
Output 0 - 5 V (ratiometric to 5 V supply voltage)
Supply voltage 5V dc
Measuring range 360°




Housing
Dimensions (indicative)
Mounting
Ingress Protection (IEC 60529)
Relative Humidity
Weight
Magnet type
Magnet distance to sensor
Max. radial magnet misalignment
Direction of magnetization
Supply voltage
Polarity protection
Current consumption
Operating temperature
Storage temperature
Measuring range
Programmable center position
Accuracy
Resolution
Sensitivity error
Offset error
Non linearity
Repeatability
Response time
Max speed
Output signal
Short circuit protection
Output load resistor
Connection (length ±10%)
Wire coding

General specifications 12589, v20190401	
Quadro30: PBT black	
30x30x15 mm	
2x steel zinc plated M3x16 mm screws	
IP67	
0 - 95% (non condensing, fully potted)	
approx 15 gr (excl. cable)	
11,2 x 5,5 x 8 mm Neodymium/N35/nickel coated/remanention 1,2 T included	
0 to 7 mm, magnet at front side, see magnet distance picture on page 2	
1 mm Radial Off Axis (< 0,3 mm for minimum non-linearity)	
Axial in 8 mm (Northpole marked)	
5V dc	
No	
≤ 25 mA	
-25 to 80°C	
-25 to 85°C	
360°	
No	
12 bit over 360° (min. step 0,09°)	
±0.5% typ. (@20°C), ±1% typ. (full Temp. range)	
Magnet + Sensor: <3° typ. (with perfect external magnet positioning)	
< ± 1° (in magnet alignment range)	
0,13°	
< 4 ms	
100 rpm	
0 - 5 V (ratiometric to 5 V supply voltage)	
Yes (T<55°C), Max 10 s (T>55°C)	
≥ 20 kΩ	
Cable 2 m PVC/PVC Liyy, black Ø 4,6 mm, wires: 3x0,34 mm² Sensor colors (static usage)	
Brown	+ Supply voltage
Black	Output
Blue	Gnd


QR30N-360HB-VK-5V

Output approx. 0V when magnetic field outside specifications


Transfer characteristic

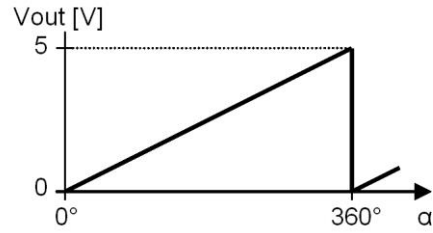

Dimensions (indicative only)

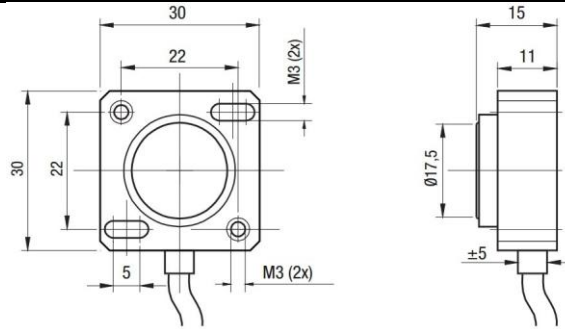

Magnet distance (side view)



Front view

Magnet drawn in $\alpha=0^\circ$ position
Magnet rotates clockwise: α increases

Magnet North pole is indicated

Magnet surface to sensor: 11,2 x 8mm
Magnet height: 5,5mm

Magnet orientation

