

QG series

QG76N CAN series

QG76N-SDXYh-030-CAN-C(F)M

Inclination sensor


2 axis horizontal mounting

Programmable device

Interface: CANopen

Parameters programmable
by CANopen object dictionary

Measuring range
 $\pm 30^\circ$

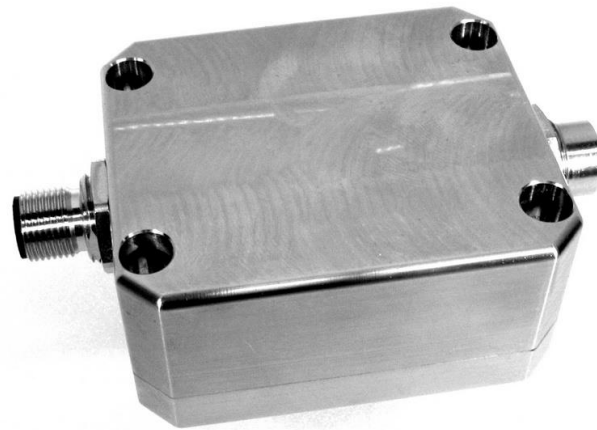

Housing
Dimensions (indicative)
Mounting
Ingress Protection (IEC 60529)
Relative humidity
Weight
Supply voltage
Polarity protection
Current consumption
Operating temperature
Storage temperature
Measuring range
Centering function
Frequency response (-3dB)
Typ. Accuracy @20°C (2σ)
Offset error
Non linearity
Sensitivity error
Resolution
Temperature coefficient
Max mechanical shock
CAN interface (hardware)
CANopen application layer and communication profile
Baud rate
Node Id
TPDO
Event time
Sync mode
Heartbeat
Programming options
Output format
Filtering
Modes of operation
Boot time
Programming options

General specifications v20190325	
	Stainless steel (AISI 316)
	70x60x33 mm
	Included: 4x M4x30 mm stainless steel (A4) Hexagon socket head screws
	IP67 (IP68 with optional cable gland)
	0 - 100%
	approx. 700 gram
	8 - 30 V dc
	Yes
	≤ 50 mA
	-40 .. +85 °C
	-40 .. +85 °C
	± 30°
	Yes (CANout 0 = 0°), range: ±5°
	0 - 20 Hz
	overall 0,15° typ.
	< ± 0,05° typ. (< ± 0,1° max.) after centering
	< ± 0,1° typ. (< ± 0,2° max.)
	not applicable
	0,05°
	± 0,01°/K typ.
	10.000 g
	According to ISO 11898-1 & ISO 11898-2 (also known as CAN 2.0 A/B)
	CANopen protocol: EN 50325-4 (CiA 301 v4.0 & and v4.2.0)
	125 kbit/s (default), 250 kbit/s, 500 kbit/s, 1Mbit/s 01h (range: 01h - 7Fh) TPDO1: 181h (for Node ID=01h) TPDO1: 5 - 500 ms (default: 100 ms) On/off (default: off) On/off (default: on, 2s)
	Baudrate, Node Id, Event time, Sync mode, Heartbeat, Output format Integer: -3000 to +3000 (PDO1:X=byte2,1;Y=byte4,3) Input filter enabled, output filter disabled Event mode, Sync-mode
	< 1 s
	by CANopen object dictionary (CAN parameters, filtering)



QG76N-SDXYh-030-CAN-C(F)M

CANoutput = 100* α
Clipping outside measuring range


Default 0°: horizontal (label upwards), no acceleration applied. To eliminate mounting offsets the sensor can be centered within $\pm 5^\circ$ tilt (by the CAN object dictionary)
Cross tilt sensitivity error:
 $< (0,12 * \text{cross tilt angle})^2 \% \text{ typ.}$
→ one axis $< 10^\circ$ tilt for max. accuracy

Connection

Wire / pin coding

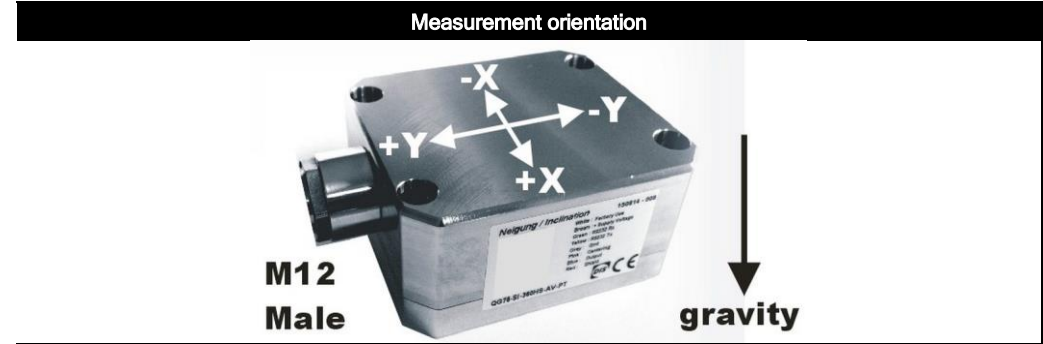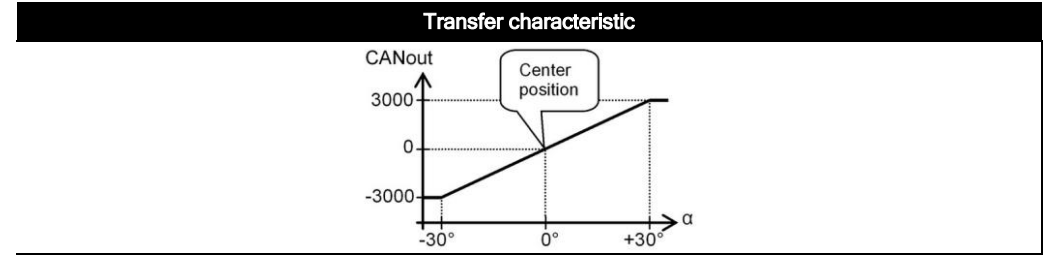

Connectivity (length $\pm 10\%$)
Male only or Male & Female (internal T-junction) M12 connector (5 pins, A-coding) (CiA303 V1.8.0) (stainless steel 1.4404 (316L), contacts copper alloy)
No bus termination inside. A CANbus always has to be terminated properly. For bus termination order separate M12 termination resistor (optional: T-connector)

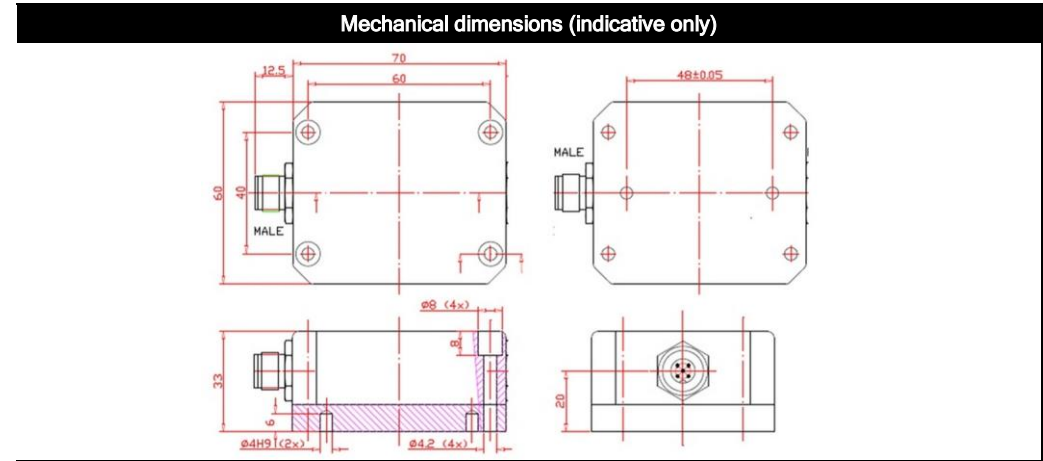

Center function, CAN-manual, EDS-file, Ordering codes
Centering can be done to eliminate mechanical offsets. (can be done by CAN object 300Fh)
The current sensor position will be stored as the new Center position in the internal Eeprom.

A CAN-manual is available at www.dis-sensors.com, see 'downloads'
EDS-file (CiA306 V1.3.0) is available at www.dis-sensors.com, see 'downloads'

As this device is accelerometer-based the sensor is inherent sensitive for accelerations/vibrations. Application specific testing must be carried out to check whether this sensor will fulfil your requirements.

Ordering codes:
M12 Male: QG76N-SDXYh-030-CAN-CM,
M12 Male & Female: QG76N-SDXYh-030-CAN-CFM