

QG65N CAN series

QG65N-KIXv-360-CAN-C(F)M

Inclination sensor

1 axis vertical mounting

Programmable device

Interface: CANopen

Parameters programmable
by CANopen object dictionary

Measuring range
 $\pm 180^\circ$




General specifications 11785/11522, v20221011

Housing	Reinforced plastic injection molded (Faradex DS, black, EMI shielded by stainless steel fiber in PC)
Dimensions (indicative)	60x50x27 mm
Mounting	Included: 4x M5x25 mm zinc plated steel pozidrive pan head screws, self-tapping (PZ DIN7500CZ) (optional: 2x Ø4mm positioning pins replacing 2x M5x25 mm)
Ingress Protection (IEC 60529)	IP67
Relative humidity	0 - 95% (non condensing, housing fully potted)
Weight	approx. 110 gram
Supply voltage	8 - 30 V dc
Polarity protection	Yes
Current consumption	≤ 50 mA
Operating temperature	-40 .. +85 °C
Storage temperature	-40 .. +85 °C
Measuring range	$\pm 180^\circ$
Centering function	Yes (CANout 0 = 0°), range: 360°
Frequency response (-3dB)	0 - 20 Hz
Accuracy (overall @20°C)	overall 0,15° typ.
Offset error	$< \pm 0,05^\circ$ typ. ($< \pm 0,1^\circ$ max.) after centering
Non linearity	$< \pm 0,1^\circ$ typ. ($< \pm 0,2^\circ$ max.)
Sensitivity error	not applicable
Resolution	0,05°
Temperature coefficient	$\pm 0,01^\circ/\text{K}$ typ.
Max mechanical shock	10.000 g
CAN interface (physical layer)	According to ISO 11898-1 & ISO 11898-2 (also known as CAN 2.0 A/B)
CANopen application layer and communication profile	CANopen protocol: EN 50325-4 (CiA 301 v4.0 and v4.2.0)
Baud rate	125 kbit/s (default, range 50/125/250/500/1000 kbit/s)
Node Id	01h (range: 01h - 7Fh)
TPDO messages	TPDO1: 181h (for Node ID=01h)
TPDO1 event time	50 ms (default, range 10-32767 ms)
Sync mode	On/off (default: off)
Heartbeat	On/off (default: off)
Programming options	Baudrate, Node Id, Event time, Sync mode, Heartbeat, Output format
Output format	Integer: -17999 to +18000 (PDO1:byte 2,1)
Filtering	Output filter disabled
Boot time	< 1 s
Programming options	by CANopen object dictionary (CAN parameters, filtering)

QG65N-KIXv-360-CAN-C(F)M

Transfer characteristic

$$\text{CANoutput} = 100 \cdot \alpha$$

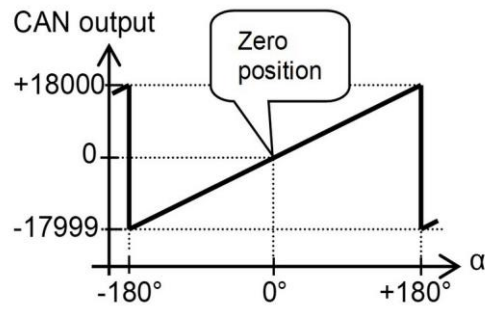


Rotation in vertical plane.

Lateral tilt sensitivity error:
 $< \pm 0,03^\circ/\text{lateral tilt (typ.)}$
 Max. lateral tilt: 45°

Drawn in the default 0° position.

Measurement orientation

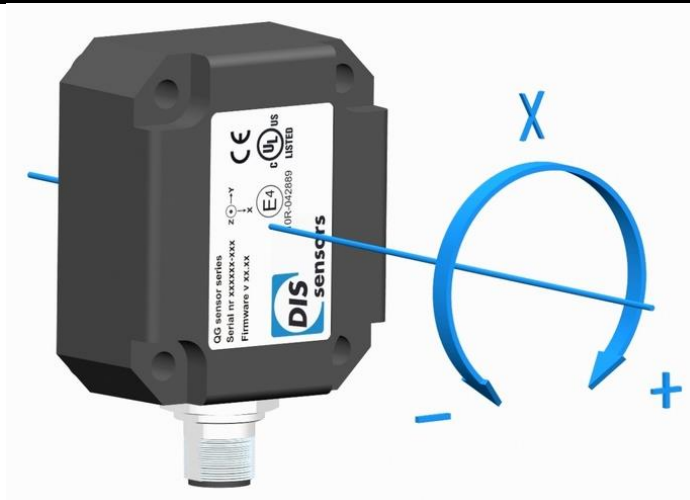


Connectivity (cable length $\pm 10\%$)

Connection


Male only or Male & Female (internal T-junction) M12 connector (5 pins, A-coding)
 (CiA303 V1.8.0) (Brass Nickel coated, contacts copper alloy)
 No bus termination inside. A CANbus always has to be terminated properly. For bus termination order separate M12 termination resistor (optional: T-connector)

Wire / pin coding

- Pin 1: Shield
- Pin 2: Vcc
- Pin 3: Gnd & CAN_GND
- Pin 4: CAN_H
- Pin 5: CAN_L



Mechanical dimensions (indicative only)

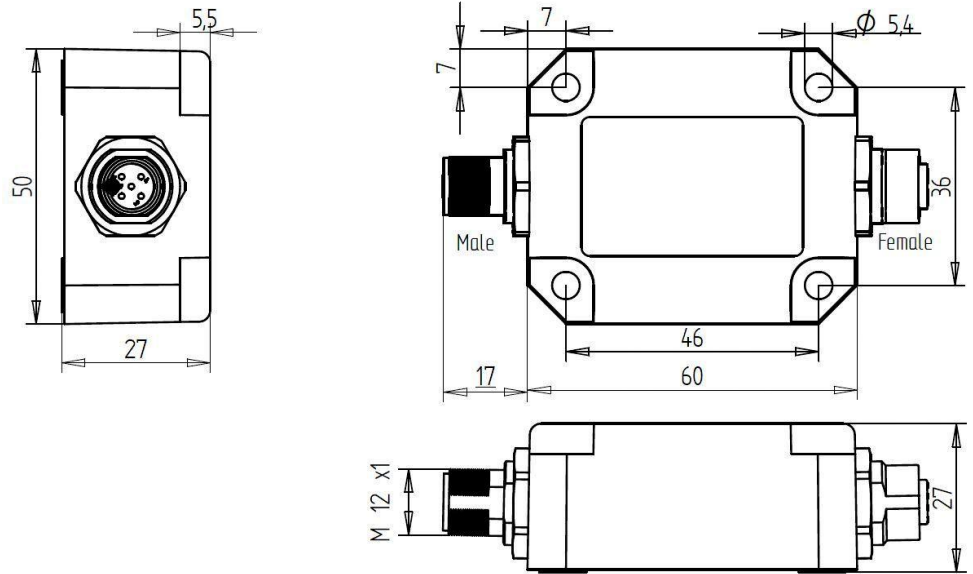

E4ready, CAN-manual, EDS-file, Ordering codes

This product is E4ready and meets Automotive EMC requirements

A CAN-manual (Ftype), an EDS-file (Ftype) and a declaration of conformity are available at www.dis-sensors.com, see 'downloads'

As this device is accelerometer-based the sensor is inherent sensitive to accelerations/vibrations. Application specific testing must be carried out to check whether this sensor will fulfil your requirements.

Ordering codes:

M12 Male: QG65N-KIXv-360-CAN-CM, 11785

M12 Male & Female: QG65N-KIXv-360-CAN-CFM, 11522