

# QG series

## QG40N-series

QG40N-KAXYh-4,0-AV-CM-UL

### Acceleration sensor

2 axis horizontal mounting

Programmable device

Output: 0,5 - 4,5 V

Measuring range programmable  
between 0,1 g and 16 g

Measuring range  
Factory defaults:  $\pm 4$  g



### General specifications 12318, v20170717

Housing	Plastic injection molded housing (Arnite T06 202 PBT black)
Dimensions (indicative)	40x40x25 mm
Mounting	Included: 2x M3x25 mm zinc plated steel pozidrive pan head screws, self-tapping (PZ DIN 7500CZ)
Ingress Protection (IEC 60529)	IP67, IP69K
Relative humidity	0 - 95% (non condensing, housing fully potted)
Weight	approx. 45 gram
Supply voltage	6 - 30 V dc
Polarity protection	Yes
Current consumption	$\leq 15$ mA
Operating temperature	-40 .. +80 °C
Storage temperature	-40 .. +85 °C
Measuring range	Factory defaults: $\pm 4$ g
Centering function	Yes (2,5 V = 0 G), range $\pm 5^\circ$
Frequency response (-3dB)	0 - 50 Hz
Typ. Accuracy @20°C (2 $\sigma$ )	overall 0,15 g typ.
Offset error	$< \pm 2\%$ F.S. (after zeroing)
Non linearity	$< \pm 1\%$ F.S.
Sensitivity error	$< \pm 2\%$
Resolution	4 mg
Temperature coefficient	$\pm 1$ mg/K typ.
Max mechanical shock	10.000 g
Output	0,5 - 4,5 V
Output load	Rload $\geq 20$ k $\Omega$ , Cload $\leq 20$ nF
Short circuit protection	Yes (max 10 s)
Output refresh rate	3 ms
Programming options	by optional QG40N-configurator (measuring range, filtering)

## QG40N-KAXYh-4,0-AV-CM-UL

$U_{out} = 2,5 + g/2$  [V]  
clipping outside measuring range

Zeroing: eliminate mech. offsets  
Connect zeroing input to ground (>0,5sec) within 1 min. after power up. Normally the zeroing input should be left unconnected.

0 g when no acceleration applied

Horizontal mounting:  
1-axis or 2-axis usage


Connect output-X and/or output-Y according the plot at the right.

Upside down mounting possible (sensor-nose down)


### Connection

Wire / pin coding

### Transfer characteristic

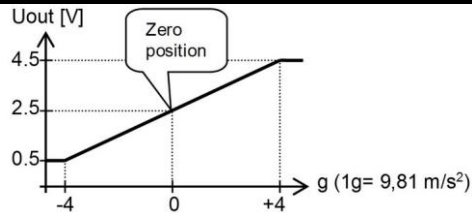


### Measurement orientation

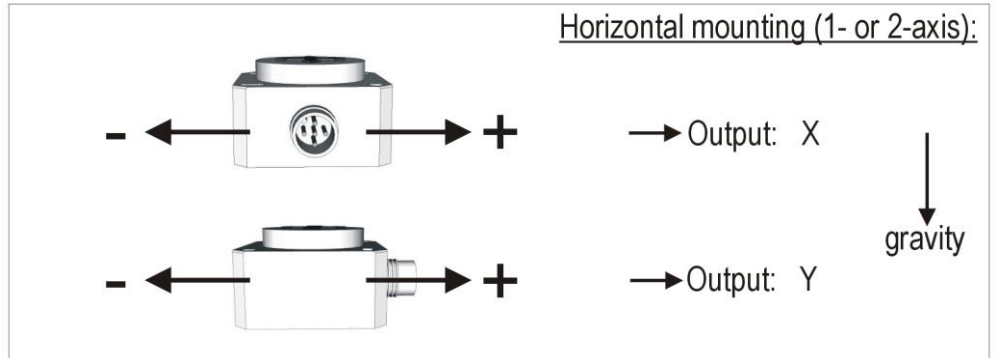

### Connectivity (length ±10%)

M12 5p male connector (Glass fibre reinforced grade, contacts CuZn pre-nickeled galv. Au)


- Pin 1: + Supply Voltage
- Pin 2: output Y
- Pin 3: Gnd
- Pin 4: output X
- Pin 5: zeroing



If connected with M12 F (accessory sold by DIS):

- Brown: '+ Supply Voltage
- White: output Y
- Blue: Gnd
- Black: output X
- Green/yellow: zeroing

### Mechanical dimensions (indicative only)

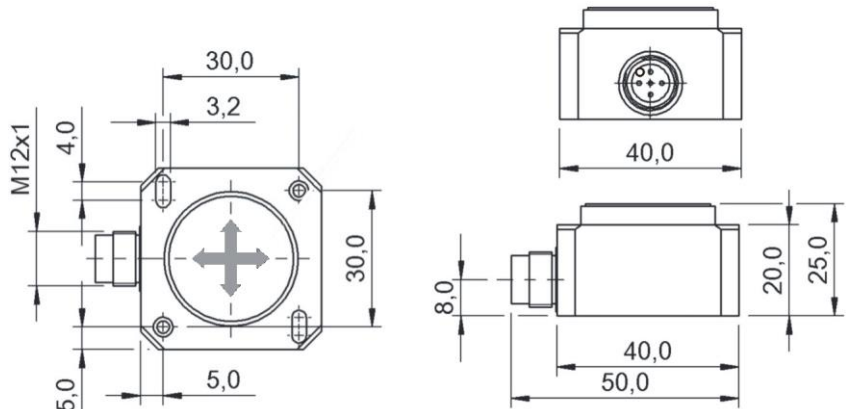

# QG series



## Intended use, UL, Remarks

QG series sensors are intended to measure inclination/acceleration/tilt. Flawless function (acc. spec.) is ensured only when used within specifications. This device is not a safety component acc. to EU Machine Directive (ISO13849). For full redundancy two devices can be used. Modifications or non-approved use will result in loss of warranty and void any claims against the manufacturer.

UL & c-UL listed product (File number E312057, UL508 standards UL60947-5-2 & CSA-C22,2 No. 14)  
Product Identity / Category Code Number (CCN): Industrial Control Equipment / NRKH & NRKH7  
Enclosure rating: type 1, Ambient temperature: max 80 °C (see also datasheet, lowest value applies)  
Electrical ratings: Intended to be used with a Class 2 power source in accordance with UL1310, max. input Voltage 32V dc (see also datasheet, lowest value applies), max. current 200mA  
Accessory Cable Assembly: Any UL-listed (CYJV/7) mating connector with mechanical locking, wire thickness of at least 30 AWG (0,05 mm<sup>2</sup>), recommended  $\leq 23$  AWG ( $\geq 0,25$  mm<sup>2</sup>)

As this device is accelerometer-based the sensor is inherent sensitive for accelerations/vibrations.  
Application specific testing must be carried out to check whether this sensor will fulfil your requirements.