

# QR series



QR40EMN-090HB-2I-CM-UL

## Absolute rotary encoder (contactless) Full Redundant

Output  
4 - 20 mA / 20 - 4 mA

Supply voltage  
10 - 32 Vdc

Measuring range  
90° (±45°)



### General specifications 14209, v20230523

Reinforced plastic injection molded (Celanex 2300 GV3/30 - glass filled PBT, black)

40x40x17 mm

Included: 2x M4x25 stainless steel pozidrive pan head screws, self-tapping (PZ DIN7500CZ), Mounting on flat surface only. Screw with care

IP67, IP69K (with IP69K mating connector)

0 - 95% (non condensing, fully potted)

approx 50 gr.

11,2 x 5,5 x 8 mm Neodymium/N35/nickel coated/remanent 1,2 T

0 to 10 mm, magnet at front side

1 mm Radial Off Axis ( < 0,3 mm for minimum non-linearity)

Axial in 8 mm (Northpole marked)

10 - 32 Vdc

Yes

≤ 25 mA ( excluding output signal )

-40 to 85°C

-40 to 85°C

90° (±45°)

No

12 bit over 360° (min. step 0,09°)

±0.5% typ. (@20°C), ±1% typ. (full Temp. range)

Magnet + Sensor: <3° typ. (with perfect external magnet positioning)

< ± 1,5° in magnet alignment range (both outputs individual)

0,13°

< 4 ms

100 rpm


4 - 20 mA / 20 - 4 mA

Yes (T<55°C), Max 10 s (T>55°C)

Rload ≤ 50\*Vs - 250 [Ω] (Eg: Vs = 24 V: Rload ≤ 950 Ω)

M12 5p male connector (Glass fibre reinforced grade, contacts CuZn pre-nickeled galv. Au)

Pin 1: + Supply voltage  
Pin 2: not connected  
Pin 3: Gnd  
Pin 4: Output 1  
Pin 5: Output 2



3 Male

Housing
Dimensions (indicative)
Mounting
Ingress Protection (IEC 60529)
Relative Humidity
Weight
Magnet type
Magnet distance to sensor
Max. radial magnet misalignment
Direction of magnetization
Supply voltage
Polarity protection
Current consumption
Operating temperature
Storage temperature
Measuring range
Programmable center position
Accuracy
Resolution
Sensitivity error
Offset error
Non linearity
Repeatability
Response time
Max speed
Output signal
Short circuit protection
Output load resistor
Connection (length ±10%)
Pinout M12 connector


<b>General specifications 14209, v20230523</b>	
Reinforced plastic injection molded (Celanex 2300 GV3/30 - glass filled PBT, black)	
40x40x17 mm	
Included: 2x M4x25 stainless steel pozidrive pan head screws, self-tapping (PZ DIN7500CZ), Mounting on flat surface only. Screw with care	
IP67, IP69K (with IP69K mating connector)	
0 - 95% (non condensing, fully potted)	
approx 50 gr.	
11,2 x 5,5 x 8 mm Neodymium/N35/nickel coated/remanent 1,2 T	
0 to 10 mm, magnet at front side	
1 mm Radial Off Axis ( < 0,3 mm for minimum non-linearity)	
Axial in 8 mm (Northpole marked)	
10 - 32 Vdc	
Yes	
≤ 25 mA ( excluding output signal )	
-40 to 85°C	
-40 to 85°C	
90° (±45°)	
No	
12 bit over 360° (min. step 0,09°)	
±0.5% typ. (@20°C), ±1% typ. (full Temp. range)	
Magnet + Sensor: <3° typ. (with perfect external magnet positioning)	
< ± 1,5° in magnet alignment range (both outputs individual)	
0,13°	
< 4 ms	
100 rpm	
4 - 20 mA / 20 - 4 mA	
Yes (T<55°C), Max 10 s (T>55°C)	
Rload ≤ 50*Vs - 250 [Ω] (Eg: Vs = 24 V: Rload ≤ 950 Ω)	
M12 5p male connector (Glass fibre reinforced grade, contacts CuZn pre-nickeled galv. Au)	
Pin 1:	+ Supply voltage
Pin 2:	not connected
Pin 3:	Gnd
Pin 4:	Output 1
Pin 5:	Output 2

## QR40EMN-090HB-2I-CM-UL


Magnet field within specifications:  
Differences between outputs < 3°

Magnet field outside specifications:  
Differences between outputs < 360°

### Transfer characteristic

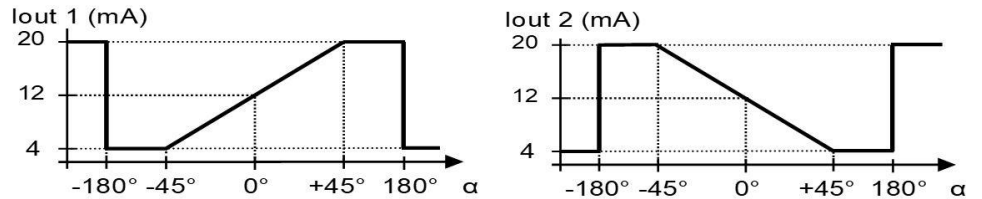

### Dimensions (indicative only)

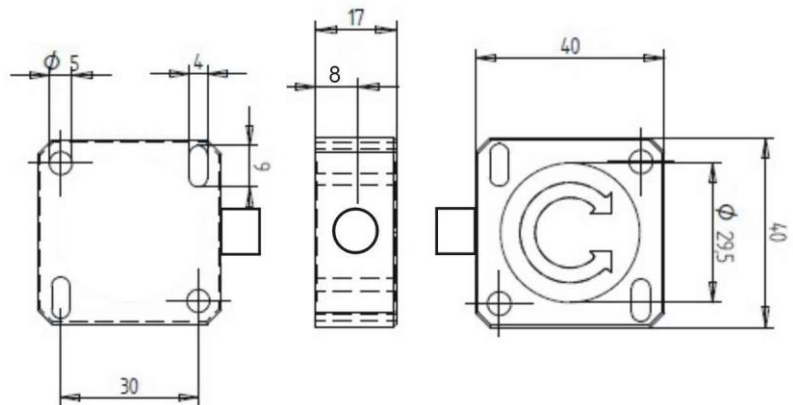

### Intended use & UL

#### Intended use:

QR series sensors are intended to measure rotation after installing in machines, equipment and systems. Flawless function in accordance with the specifications is ensured only when the device is used within its specifications. Modifications or non-approved use are not permitted and will result in loss of warranty and void any claims against the manufacturer.

This device can be used as safety component according to the EU Machine Directive (ISO13849), if the cross-check function between both outputs is performed by the application. An algorithm should be implemented in the application that compares the two outputs of this sensor, and brings the application into safe state if the difference between the two outputs exceeds the limits that fits the application involved.

#### UL:

UL certificate: UL File number: E312057

UL & c-UL listed product (standards UL60947-5-2 & CSA-C22,2 No. 14)

Product Identity / Category Code Number (CCN): Industrial Control Equipment / NRKH & NRKH7

Enclosure / Temperature rating: Enclosure type 1 / Temperature -40° . . +85°C

Electrical rating: Intended to be used with a Class 2 power source in accordance with UL1310

#### Front view

Magnet drawn in  $\alpha=0^\circ$  position  
Magnet rotates clockwise:  $\alpha$  increases

Magnet North pole is indicated

Magnet surface to sensor: 11,2 x 8mm  
Magnet height: 5,5mm

### Magnet orientation

