

QG series

QG40N-series

QG40N-KAXYZ-16,0-AV-PT
Acceleration sensor
3 axis
Programmable device
Output: 0,5 - 4,5 V
Measuring range programmable between 0,1 g and 16 g
Measuring range Factory defaults: ± 16 g



General specifications v20170717	
Housing	Plastic injection molded housing (Arnite T06 202 PBT black)
Dimensions (indicative)	40x40x25 mm
Mounting	Included: 2x M3x25 mm zinc plated steel pozidrive pan head screws, self-tapping (PZ DIN 7500C)
Ingress Protection (IEC 60529)	IP67
Relative humidity	0 - 100%
Weight	approx. 45 gram (cable excluded)
Supply voltage	6 - 30 V dc
Polarity protection	Yes
Current consumption	≤ 15 mA
Operating temperature	-40 .. +80 °C
Storage temperature	-40 .. +80 °C
Measuring range	Factory defaults: ± 16 g
Centering function	Yes (2,5 V = 0 G), range $\pm 5^\circ$ (horizontal axes only)
Frequency response (-3dB)	0 - 50 Hz
Typ. Accuracy @20°C (2 σ)	overall 0,5 g typ.
Offset error	$< \pm 2\%$ F.S. (after zeroing)
Non linearity	$< \pm 1\%$ F.S.
Sensitivity error	$< \pm 2\%$
Resolution	10 mg
Temperature coefficient	± 1 mg/K typ.
Max mechanical shock	10.000 g
Output	0,5 - 4,5 V
Output load	Rload ≥ 20 k Ω , Cload ≤ 20 nF
Short circuit protection	Yes (max 10 s)
Output refresh rate	3 ms
Programming options	by optional QG40N-configurator + optional QG40N breakout-cable (measuring range, filtering)

QG40N-KAXYZ-16,0-AV-PT

$U_{out} = 2,5 + g/8$ [V]
clipping outside measuring range

Zeroing: eliminate mech. offsets
Connect zeroing input to ground (>0,5sec) within 1 min. after power up. Normally the zeroing input should be left unconnected.

The default 0 g position is when the sensor is mounted horizontal or vertical and no acceleration is applied. The axis parallel to earth gravity will indicate 1 g, the two horizontal axes will indicate 0 g.

Connect output-X and/or output-Y and/or output-Z according to the plot at the right

Mounting in all horizontal or vertical positions possible


The two horizontal axes can be zero-ed within $\pm 5^\circ$ tilt to eliminate mounting offsets.

The axis parallel to earth gravity cannot be zero-ed.


Connection

Wire / pin coding

Transfer characteristic

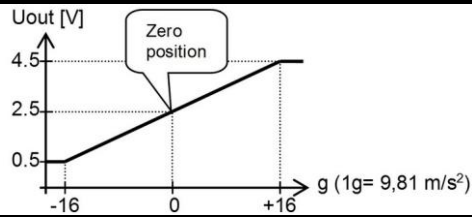

Measurement orientation

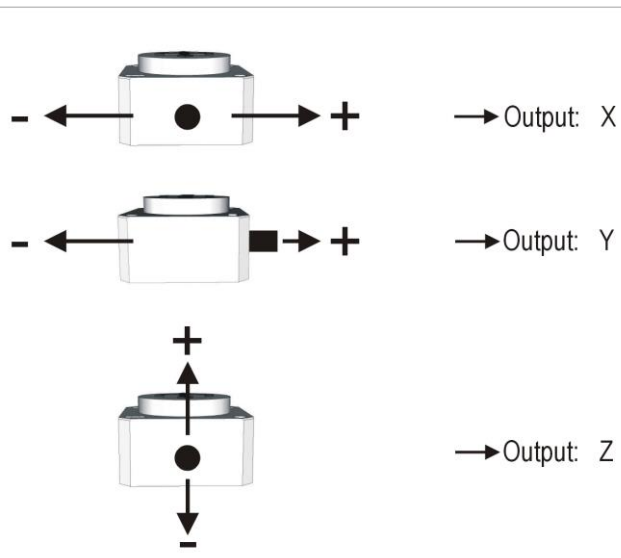


Connectivity (length $\pm 10\%$)

2 m PUR/TPE Li12y11y, black $\varnothing 5,4$ mm, wires: 6x0,34 mm² DIN colors

White	Zeroing
Brown	+ Supply Voltage
Green	GND
Yellow	Output X
Grey	Output Y
Pink	Output Z

Mechanical dimensions (indicative only)

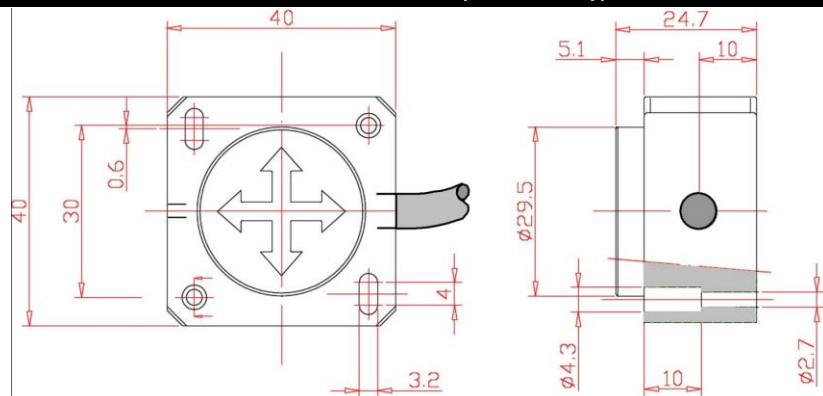

Intended use, Remarks

QG series sensors are intended to measure inclination/acceleration/tilt. Flawless function (acc. spec.) is ensured only when used within specifications. This device is not a safety component acc. to EU Machine Directive (ISO13849). For full redundancy two devices can be used. Modifications or non-approved use will result in loss of warranty and void any claims against the manufacturer.

As this device is accelerometer-based the sensor is inherent sensitive for accelerations/vibrations. Application specific testing must be carried out to check whether this sensor will fulfil your requirements.